

# Design of optimum spacecraft reorientation control with a combined criteria of quality based on the quaternions

Mikhail Levskii

Maksimov Research Institute of Space systems as branch of Khrunichev State Space research-and-production Center, Korolev, 141091 Moscow region, Russia; [levskii1966@mail.ru](mailto:levskii1966@mail.ru)

## CITATION

Levskii M. Design of optimum spacecraft reorientation control with a combined criteria of quality based on the quaternions. *Mechanical Engineering Advances*. 2024; 2(2): 1578.  
<https://doi.org/10.59400/mea.v2i2.1578>

## ARTICLE INFO

Received: 31 July 2024  
Accepted: 12 October 2024  
Available online: 11 November 2024

## COPYRIGHT



Copyright © 2024 by author(s).  
*Mechanical Engineering Advances* is published by Academic Publishing Pte. Ltd. This work is licensed under the Creative Commons Attribution (CC BY) license.  
<https://creativecommons.org/licenses/by/4.0/>

**Abstract:** Specific original problem of attitude controlling for spacecraft was proposed in this paper. Problem of optimal rotation from a known initial state in a prescribed spatial orientation was studied in detail (turnaround time is not fixed). Design of optimal program of reorientation is based on new indicator of quality that combines energy costs including the contribution of controlling torques and integral of rotary energy (in a known proportion) and reorientation time; presence of duration factor bounds time of rotation finish. To construct an optimal control of angular momentum changing, quaternionic method and the maximum principle were applied. Differential equation that relates spacecraft angular momentum and quaternion of spacecraft orientation is a base to obtain analytic solution to a problem. We reveal the properties of optimum control program analytically, and study key features of optimum motion in details. Also, we write the formalized equations, mathematical formulas to design optimal law for change of spacecraft's angular momentum. Analytic relations and equations are given for finding the optimal solution. Control law (in as explicit dependence between phase variables and controlling variables has been formulated. Main relations determining optimum values of parameters for rotation control algorithm were given. The closed-form law for rotation was obtained for dynamically symmetric solids. Numerical example as well as results of mathematical modeling of spacecraft motion that formed using optimum control are presented. This data as addition to the made theoretic descriptions shows reorientation process (in virtual form) and demonstrates practical feasibility of the developed control method. A designed algorithm for optimal control of rotation improves an efficiency of attitude system, and originates more economical performing of space vehicle during its flight along orbit.

**Keywords:** quaternion; spatial attitude; optimal control; angular momentum; maximum principle; combined criterion of quality; boundary value problem

## 1. Introduction

Spacecraft transfer problem from its initial spatial position into a given angular position has been solved. Spatial reorientation consists in moving of spacecraft axis from the known attitude in another given position within finite time  $T$ . Spacecraft attitude is specified with respect to the chosen frame of reference. A case when inertial frame was reference basis has been considered. Use of new quality indicator (without any constraint for the control variables) is principal difference in solution proposed.

Problem of controlling the angular position of a solid is known very well [1–28]. It was considered in various formulations and studied by different methods in wide range, including analytic design of optimum controllers [1], or basing on inverse dynamics problem [2] and others, as well as issues of optimum control [1,3–26]. Methods for optimizations are very different, for example, optimization based on the maximum principle [9–26], where classical criteria for estimate control process (a

speed-optimal [4–12], energy costs [11,13,14,19], minimum fuel consumption [14], etc.) have been used, or kinematic problems on turning [15–18]. Optimum control problem in dynamic statements is of special interest; in particular case (when process end time is fixed) method of variables separation was applied [14]. Analytic solution of optimum turn controlling in a closed form remain practically important because this solution allow a finished law of program control to be applied onboard (as well as variation of optimal rotation trajectory of spacecraft). But extremely difficult to solve problem and find optimum law for solids when moments of inertia are arbitrary. Consequently, approximate numeric methods can be used only for solving the problem of a turn. Some special cases of control were known in case of spherically symmetric [12,19] or solids with dynamical symmetry [8–11,16,20–22]. Specific features of control for the spacecrafts equipped with inertial actuators (for example, the gyroscopes) were investigated earlier [29–31]. Attitude system based on control using the gyroscopes (or other control moment gyroscopes) can use the patented method [31].

Personal contribution of authors of papers published earlier is: Sinitin and Kramlikh [1] advanced the method of analytical construction of optimal regulators for problems of spacecraft attitude. Velishchanskii and Krishchenko [2] successfully adapted the method of inverse problems of dynamics well-known in the theory of dynamic systems to the problems of angular motion control. Branets and Shmyglevskii [12] have developed theory of quaternion application to issues of description of solid rotations kinematics and control of a spacecraft (in other domains of sciences, quaternionic approach was used also). Zelepukina et al. [16] investigated in detail the construction of optimal laws of variation in the angular momentum vector during spatial turn (including for axisymmetric rigid spacecraft). Huge range of problems of optimal control with application of maximum principle basing on the quaternions were solved by Molodentkov and Sapunkov [10] in different years (approximate solutions or numerical solutions are given); analytical solutions were obtained for axisymmetric spacecraft and spherically symmetric spacecrafts, moreover, different criteria of quality was used. Lastly, Aipanov and Zhakypov [14] proposed the method of separation of variables for solving the problems of optimal turn control.

Below, we will solve a problem of optimum spacecraft rotation with new indicator of quality that combines (in an assigned proportion) the contribution of control for performing a maneuver (in energy consumption sense) and an integral of rotary energy; a presence of such integral leads to limitation of energy of rotation during a turn). Phase variables are orientation quaternion and spacecraft angular momentum. This problem statement differs significantly from earlier research with the complex functional by type of optimality index which includes both control variables and phase variables, as well as time of maneuver [21–26]. In our paper, the adopted functional characterizes complex combination of the energy costs and time, necessary for a turning. Minimization of such functional is important issue for spaceflight practice. Currently, cost-efficiency control remains very relevant for space engineering. Defining and studying an optimum rotation control from one attitude to other attitude (with minimum of a selected optimality index) is topic and subject of research.

## **2. Statement of the optimal control problem**

Let us describe spatial motion about center mass by mathematic apparatus of quaternions (Rodrigues-Hamilton parameters). A motion of body frame  $E$  relative to reference frame is given by normalized quaternion  $\Lambda$  (body frame  $E$ , or spacecraft coordinate system, is formed by the principal central axis of inertia),  $\|\Lambda\|=1$  [12]. We assume that reference frame is inertial. Initial and final spacecraft attitude in inertial frame we specify by quaternions  $\Lambda_{in}$  and  $\Lambda_f$ . Kinematic equation has the form [12]:

$$2\dot{\Lambda} = \Lambda \circ (I^{-1}L) \quad (1)$$

where symbol  $\circ$  is mark for quaternion multiplication. Spacecraft angular momentum (as rigid body) changes according to the equation [24,26]:

$$\dot{L} + (I^{-1}L) \times L = M \quad (2)$$

where  $L$  is spacecraft angular momentum,  $I$  is inertia tensor,  $M$  is control torque (symbol  $\times$  means a vector product of vectors). Disturbance torques (atmosphere and perturbation caused by external field) are negligibly small, it is very important for spacecraft control during spaceflight. The spacecraft is controlled around center of mass by vector  $M$ . The boundary conditions for controlled system Equations (1) and (2) are:

$$\Lambda(0) = \Lambda_{in}, L(0) = 0 \quad (3)$$

$$\Lambda(T) = \Lambda_f, L(T) = 0 \quad (4)$$

where  $T$  is rotation end time;  $\Lambda_{in}$ , and  $\Lambda_f$  specify attitude of a spacecraft at initial and final instant (they must satisfy a requirement  $\|\Lambda_{in}\| = \|\Lambda_f\| = 1$ ). It is set that rotary motion is regulated using control system which creates torques about three main central axis of inertia. For optimization of control program, its efficiency is specified by indicator:

$$G = \int_0^T (M_1^2/J_1 + M_2^2/J_2 + M_3^2/J_3)dt + k_1 \int_0^T (L_1^2/J_1 + L_2^2/J_2 + L_3^2/J_3)dt + k_2 T \quad (5)$$

where  $M_i$  are projections of control torque  $M$  on principal central axis of spacecraft's inertia ( $i = 1, 2, 3$ );  $L_i$  are projections of angular momentum  $L$  on axis of spacecraft frame;  $J_i$  are principal central moments of inertia;  $k_1 > 0, k_2 > 0$  are the positive constant coefficients ( $k_1 \neq 0, k_2 \neq 0$ ).

We formulate optimal control problem as following: spacecraft needs to be turned from Equation (3) into Equation (4) according to Equations (1) and (2) and minimum sum Equation (5), where  $\Lambda_f \neq \pm \Lambda_{in}$ . Duration of turn  $T$  is unfixed. Solution-function  $M(t)$  is found within piecewise-continuous functions of time.

Accepted criteria of optimality Equation (5) distinguishes our problem of optimization from other considered tasks by functional type that must be minimized. Index Equation (5) combines energy costs (including the contributions of control) and time (in its proportion). An adopted criteria allows to estimate an energetically advantageous trajectory from initial orientation  $\Lambda_{in}$  to a required termination attitude  $\Lambda_f$  with minimum costs of the controlling resources and energy, and for determination of control mode corresponding to optimum turn. Energy integral in (2.5) limits kinetic

energy during rotation. The required turn may be executed for any values  $\Lambda_{in}$ ,  $\Lambda_f$  and  $J_1$ ,  $J_2$ ,  $J_3$ ,  $k_1$  и  $k_2$  because the time  $T$  is not fixed. Since combination of quadratic performance criterion and time is optimized, optimal duration of a turn  $T_{opt}$  exists to be minimum of Equation (5). The optimal rotation problem, when control process quality is estimated by the index Equation (5), is relevant.

Note that angular momentum control for spatial turn minimizing an indicator Equation (5) is useful for spacecraft's attitude system using electric-jet engines (EJE): when controlled using EJE (in particular, with use of ion-engines), in Equation (5) first integral is proportional to electric energy consumed (for EJE, thrust and electric current are directly-proportional [32], and torque of EJE is proportional to an arm of engine installation). We know about a necessity of all-round decrease of electrical consumption for control of motion, a select of functional is clear.

### 3. Materials and methods

Optimal control problem proposed is dynamical problem of optimum turn [12]; consequently,  $M_i$  are the functions that should be found (control by optimal way of spatial motion), but  $L$  and  $\Lambda$  are the phase variables. A norm of quaternion  $\Lambda$  is constant,  $\|\Lambda\| = \text{const}$  [12]. We solve optimum control issue and find optimum law of spacecraft's angular momentum changing during spatial rotation basing on the method of quaternions and Pontryagin's maximum principle [12,33]. They were used by many scientists and researchers, but for other index form [1,12,13–17,21–28]. Quaternions is mathematical tool that were effective applied in another domains of sciences [34–36], also in research process on controled motion of solids. Also, we apply numerical simulation (mathematical modeling) (for proof feasibility in engineering practice). To solve differential equations systems, we made method of successive approximations (shooting algorithm). Method of iteration was applied for solving two-point boundary value problem; other numerical methods have been used also.

The procedure of solving the optimization problem proposed and formulated in section 2 is as follows. In accordance with the Pontryagin's maximum principle [33], conjugate variables  $\phi_i$  corresponding to angular momentum projections on spacecraft axis  $L_i$  are introduced. The Hamiltonian  $H$  for the problem Equations (1)–(5) is:

$$H = -k_2 - k_1(L_1^2/J_1 + L_2^2/J_2 + L_3^2/J_3) - M_1^2/J_1 - M_2^2/J_2 - M_3^2/J_3 + \phi_1(M_1 + (1/J_3 - 1/J_2)L_2L_3) + \phi_2(M_2 + (1/J_1 - 1/J_3)L_1L_3) + \phi_3(M_3 + (1/J_2 - 1/J_1)L_1L_2) + L_1r_1/J_1 + L_2r_2/J_2 + L_3r_3/J_3$$

where  $r_i$  are [19,24]:

$$r_1 = (\lambda_0\psi_1 + \lambda_3\psi_2 - \lambda_1\psi_0 - \lambda_2\psi_3)/2,$$

$$r_2 = (\lambda_0\psi_2 + \lambda_1\psi_3 - \lambda_2\psi_0 - \lambda_3\psi_1)/2,$$

$$r_3 = (\lambda_0\psi_3 + \lambda_2\psi_1 - \lambda_3\psi_0 - \lambda_1\psi_2)/2$$

$\psi_j$  are conjugate variables, corresponding to components of quaternion  $\lambda_j$  ( $j = 0, 1, 2, 3$ ).

Writing and structure of  $H$  does not take into account phase constraint  $\|\Lambda\|=1$  due to  $\|\Lambda(0)\| = 1$ . We use universal variables  $r_i$  proposed earlier [12,19] because the

minimized index (2.5) does not depend on quaternion  $\Lambda$ . The equations for vector  $\mathbf{r}$  formed by variables  $r_i$  (optimal functions  $r_i$  also) are [24–26]:

$$\begin{aligned}\dot{r}_1 &= L_3 r_2 / J_3 - L_2 r_3 / J_2, \\ \dot{r}_2 &= L_1 r_3 / J_1 - L_3 r_1 / J_3, \\ \dot{r}_3 &= L_2 r_1 / J_2 - L_1 r_2 / J_1, \\ \dot{r} &= r \times (I^{-1} L)\end{aligned}\quad (6)$$

It is known that  $r$  turns out to be motionless in inertial frame,  $|r| = \text{const} \neq 0$  [19]. In accordance with the maximum principle, for functions  $\phi_i$ , the equations are [33]:

$$\dot{\phi}_i = -\frac{\partial H}{\partial L_i} \quad (i = 1, 2, 3)$$

Conjugate equations system (after differentiation of  $H$ ) has the form

$$\begin{aligned}\dot{\phi}_1 &= 2k_1 L_1 / J_1 + L_3 \phi_2 (1/J_3 - 1/J_1) + L_2 \phi_3 (1/J_1 - 1/J_2) - r_1 / J_1 \\ \dot{\phi}_2 &= 2k_1 L_2 / J_2 + L_1 \phi_3 (1/J_1 - 1/J_2) + L_3 \phi_1 (1/J_2 - 1/J_3) - r_2 / J_2 \\ \dot{\phi}_3 &= 2k_1 L_3 / J_3 + L_2 \phi_1 (1/J_2 - 1/J_3) + L_1 \phi_2 (1/J_3 - 1/J_1) - r_3 / J_3\end{aligned}\quad (7)$$

Searching an optimum mode is in writing and solving the equations of motion Equations (1) and (2) and the Equations (6) and (7) under condition that a found control itself is selected by maximization of Hamiltonian. Equation (6) that defines behavior of  $r$  in body frame  $E$ , will be used, replacing the conjugate equations for  $\psi_j$ . Optimum function  $r(t)$  and quaternion  $\Lambda(t)$  are related [19,24–28]

$$r = \tilde{\Lambda} \circ c_E \circ \Lambda,$$

where  $c_E = \text{const} = \Lambda_{\text{in}} \circ r(0) \circ \tilde{\Lambda}_{\text{in}}$

where  $\tilde{\Lambda}$  is quaternion conjugate to  $\Lambda$  [12, p. 10–20]; and  $r(0) \neq 0$  (in another case  $r_1 = r_2 = r_3 = 0$  and solution of problem loses sense).

Vector direction  $c_E$  is determined by initial and terminal spacecraft attitude:  $c_E$  must be defined by solution of Equation (1) and  $\Lambda(T) = \Lambda_f$ . Differential Equations (6) and (7), together with requirement of maximum for Hamilton function  $H$ , are necessary optimality conditions. Conditions of maximum for  $H$  determine control function  $M(t)$ ; also,  $A(0)$ ,  $L(0)$ ,  $\Lambda(T)$ ,  $L(T)$  determine solutions  $\Lambda(t)$  and  $r(t)$ ,  $L(t)$  [24]. A boundary-value problem of maximum principle is in calculating such  $r(0)$  for which solving of differential Equations (1) and (2), Equations (6) and (7) together with Hamiltonian maximization, at any time, satisfies the conditions Equations (3) and (4). The restriction  $\|\Lambda(t)\|=1$  for phase variable  $\Lambda$  not taken into account because it holds for Equation (1).

#### 4. Principle scheme and algorithm of solving control problem

To specify controlling function  $M(t)$  and vector  $r$ , maximality conditions for  $H$  should be formalized. If  $u_i = M_i / \sqrt{J_i}$  and  $n_i = \phi_i \sqrt{J_i}$ , writing of  $H$  gives, using

variables  $u_i$  and  $n_i$

$$H = u \cdot n - |u|^2 + H_{inv} = |n||u| \cos\delta - |u|^2 + H_{inv}$$

where  $H_{inv}$  not explicitly depends on the functions  $M_i$ ;  $n$  and  $u$  are two vectors of  $u_i$  and  $n_i$ ; angle between  $u$  and  $n$  is  $\delta$  (sign “ $\cdot$ ” means scalar product of vectors). The Hamiltonian  $H$  is quadratic function of functions  $M_i$ ,  $H$  is maximum if only  $\delta = 0$ . Necessary conditions of extremum are  $\partial H/\partial M_i = 0$ . After applying them:

$$M_i = J_i\phi_i/2 \tag{8}$$

Problem of determination of optimum control is in a solving of Equations (1) and (2), and Equations (6) and (7) under requirement that a sought control  $M$  is generated by Equation (8). The problem of optimum control Equations (1)–(5) formulated above is completely solved. Since  $|r| = \text{const} = |r(0)| \neq 0$ , transfer to a normalized vector  $p$ :  $p = r/|r|$ , and  $|r(0)| = r_0$  ( $|p| = 1$ ). For  $p$ , or elements  $p_i$ :

$$\begin{aligned} \dot{p} &= p \times (I^{-1}L) \\ \dot{p}_1 &= L_3p_2/J_3 - L_2p_3/J_2 \\ \dot{p}_2 &= L_1p_3/J_1 - L_3p_1/J_3 \\ \dot{p}_3 &= L_2p_1/J_2 - L_1p_2/J_1 \end{aligned} \tag{9}$$

Note:  $r_i = |r(0)|p_i$ . Since  $L(0) = L(T) = 0$ , we see that our issue Equations (1)–(5) has single and unique solving:

$$\phi_i = a(t)p_i/J_i \tag{10}$$

$$L_i = b(t)p_i \tag{11}$$

where  $p_i = r_i/r_0$ ;  $a(t)$  and  $b(t)$  are scalar time functions (but  $b(t) \geq 0$ ). Respectively,  $M_i = a(t)p_i/2$ .

Successive substitution of dependences Equation (10) into Equation (7), by taking into account relations Equation (11) with  $r_i = r_0 p_i$ , proofs a validity of solution which we specified. i.e., Equations (10) and (11) for the differential equations system Equations (2) and (7), Equations (8) and (9) is truly (relation Equation (11) follows directly from the system Equations (2), (8) and (10). From Equations (7), (10) and (11), we see that optimal functions satisfy the relation.

$$\dot{a}(t) = 2k_1b - r_0 \tag{12}$$

The Equations (7), (8) and (11) give dependence  $\dot{b} = a/2$  for  $b(t)$ , or

$$b(t) = 0.5 \int_0^t a(t)dt$$

Taking into account last dependence and condition Equation (12), we obtain  $\ddot{a} = k_1a$  for  $a(t)$ , which has analytical form:

$$a(t) = C_1 \exp(-t\sqrt{k_1}) + C_2 \exp(t\sqrt{k_1}) \tag{13}$$

where  $C_1$  and  $C_2$  are some constants that will be determined below.

It is seen,  $b(0) = b(T) = 0$  and  $\dot{a}(0) = \dot{a}(T) = -r_0$ , since  $L(0) = 0$ ,  $L(T) = 0$ . As

consequence,  $r_0 = \sqrt{k_1}(C_1 - C_2)$ . Therefore, for optimal rotation,  $b(t)$  is:

$$b(t) = (\dot{a}(t) + r_0)/(2k_1) = [C_2 \exp(t\sqrt{k_1}) - C_1 \exp(-t\sqrt{k_1}) + C_1 - C_2]/(2\sqrt{k_1}) \quad (14)$$

Hamilton function  $H$  not explicitly depends on the time explicitly, and time of rotation finish  $T$  is not fixed. Whence, for optimal control  $H = \text{const} = 0$  [37]. At ends of trajectory  $L = L = 0$ , hence:

$$H(0) = H(T) = -K_2 - \frac{J_1\phi_1^2 + J_2\phi_2^2 + J_3\phi_3^2}{4} + \frac{J_1\dot{\phi}_1^2 + J_2\dot{\phi}_2^2 + J_3\dot{\phi}_3^2}{2} = (J_1\dot{\phi}_1^2 + J_2\dot{\phi}_2^2 + J_3\dot{\phi}_3^2)/4 - k_2$$

or  $H(0) = H(T) = M_1^2/J_1 + M_2^2/J_2 + M_3^2/J_3 - k_2 = 0$ . Whence  $a_2(0) = a_2(T) = 4k_2/(p_1^2/J_1 + p_2^2/J_2 + p_3^2/J_3)$ .

Optimal rotation has specific property:  $p_1^2/J_1 + p_2^2/J_2 + p_3^2/J_3 = \text{const}$  for  $p_i$  (or ort  $p$ ). To confirm this feature, left side was differentiated (with accounting for Equations (9) and (11)). After substitution  $\dot{p}_i$  by Equation (9) and then  $L_i$  by the formulas Equation (11), we show that the resulting derivative is zero. For optimum function  $a(t)$ , must satisfy the requirements:

$$a(0) = 2\sqrt{k_2}/C a(T) = -2\sqrt{k_2}/C a(T/2) = 0, \dot{a}(0) = \dot{a}(T) = -r_0(C = \sqrt{p_{10}^2/J_1 + p_{20}^2/J_2 + p_{30}^2/J_3})$$

Last equality follows from Equation (12), since  $b(0) = b(T) = 0$ ; conditions  $L(0) = 0$  and  $L(T) = 0$  for optimal turn. The property  $a(T) = -a(0)$  follows from the necessary condition of optimality  $H(0) = H(T) = 0$  (and Equations (8) and (10)). We can write (on the base Equation (13)):

$$\dot{a}(t) = \sqrt{k_1}(C_2 \exp(t\sqrt{k_1}) - C_1 \exp(-t\sqrt{k_1}))$$

$$\dot{a}(0) = \sqrt{k_1}(C_2 - C_1) = \dot{a}(T) = \sqrt{k_1}(C_2 \exp(T\sqrt{k_1}) - C_1 \exp(-T\sqrt{k_1}))$$

Comparison of  $\dot{a}(0)$  and  $\dot{a}(T)$  gives the equations  $C_2(\exp(T\sqrt{k_1}) - 1) = C_1(\exp(-T\sqrt{k_1}) - 1)$ , or  $C_1 = -C_2 \exp(T\sqrt{k_1})$ . From Equation (14), we proof  $b(0) = 0, b(T) = 0$ . Also  $a(T) = -a(0)$  and  $a(T/2) = 0$ , since we have (basing on Equation (13)):  $a(0) = C_1 + C_2, a(T) = C_1 \exp(-T\sqrt{k_1}) + C_2 \exp(T\sqrt{k_1}) = -C_2 - C_1$ ,

$$a(T/2) = C_2(\exp(T\sqrt{k_1}/2) - \exp(-T\sqrt{k_1}/2))$$

But  $r_0 = \sqrt{k_1}(C_1 - C_2) = C_1\sqrt{k_1}(\exp(-T\sqrt{k_1}) + 1) > 0$ , whence  $C_1 > 0, C_2 < 0$  (and  $|C_1| > |C_2|$ ).

Structure analysis of optimal  $a(t)$  shows  $\dot{a} < 0$  in every instant  $t \in [0, T]$ ,  $\dot{a}$  is minimum at right and left bound points of trajectory:  $\dot{a}(0) = \dot{a}(T) = -r_0$ . Note see, that  $\dot{a}(0) < 0, \dot{a}(T) < 0$ , and  $C_1 > 0$ , but  $C_2 < 0$ , therefore  $a(0) > 0$ , but  $a(T) < 0$ . If  $t < T/2$ , then  $a > 0$  and  $\ddot{a} > 0$ , but  $\dot{a} < 0$ ; within interval  $t > T/2$  we have  $a < 0$  and  $\ddot{a} < 0$ , but  $\dot{a} < 0$ . At instant  $t = T/2$  we see that  $\dot{a}$  is maximum (since  $a(T/2) = 0$  and  $b$  has maximal value). Also,  $\dot{a}(T/2) = -2C_1\sqrt{k_1} \exp(-T\sqrt{k_1}/2) < 0$ . Hence,  $\dot{a} < 0$  during time period  $t \in [0, T]$ , time when  $\dot{a}(t) = 0$  is absent. Concrete values of  $C_1, C_2$  depend on the coefficients  $k_1, k_2$  and integral.

$$Q = \int_0^T |L(t)| dt = \int_0^T b(t) dt \quad (15)$$

Its value not depends on behavior of function  $b(t)$  (for motions according to Equations (9) and (11)); it is defined solely by attitude  $A_m, A_f$ , and spacecraft's moments of inertia [18] ( $Q$  is computed together with  $p_0$ ).


Maximum rotary energy  $E_k$  and maximum angular momentum achieved at  $t = T/2$ ;  $E_{\max} = E_k(T/2)$ ;  $L_{\max} = |\mathbf{L}(T/2)|$ . If  $k_1 = 0$ ,  $a(t)$  is linear time function  $a(t) = 2\sqrt{k_2}(1 - 2t/T)/C$

(modulus of spacecraft angular momentum is quadratic function of time, respectively), duration of reorientation is  $T = \sqrt{6CQ/\sqrt{k_2}}$ . Hence,

$$L \sqrt{3Q\sqrt{k_2}/(8C)}_{\max} \text{ and } E\sqrt{k_2}_{\max}.$$

**Figure 1** shows the form of optimum  $b(t)$ ,  $a(t)$  (depending of coefficient  $k_1$  of optimized index (2.5) ( $k_1^{(2)} > k_1^{(1)} > 0$ ,  $k_1^{(3)} > k_1^{(2)}$ ); the dotted lines correspond to a case  $k_1 \rightarrow 0$ . The values  $a(0)$  and  $a(T)$  are fixed (they do not change if variate value  $k_1$ ),  $a(0) = 2\sqrt{k_2}/C$ ,  $a(T) = -2\sqrt{k_2}/C$ ,  $a(T/2) = 0$ .



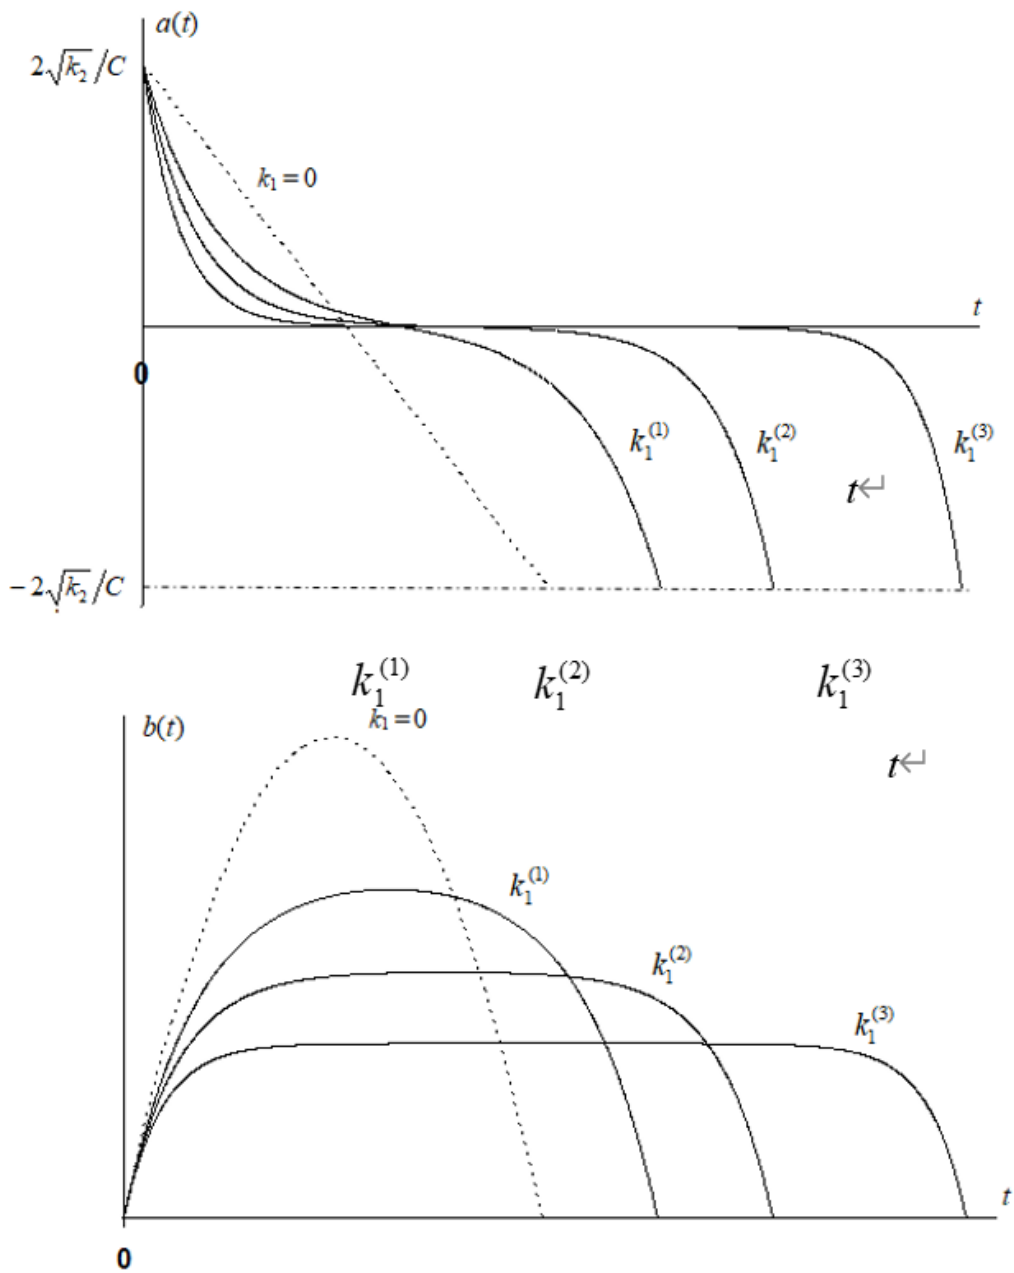

**Figure 1.** Optimum of  $a(t)$  and  $b(t)$ .

If  $k_1$  more, then function  $b(t)$  more fast transfer to segment with  $\dot{b} \approx 0$ . When  $b_{\max}$  decreases, a finish time of rotation maneuver increases, since the value (4.8) is invariable (it does not depend on the coefficients  $k_1, k_2$ ). Thus, the function  $b(t)$  more remotes from quadratic function (parabolic form) and is approximated to piecewise linear dependence when  $k_1$  increases, it can approximate by function included the following segments: time interval with  $\dot{b} \approx \sqrt{k_2}/C$ , further  $b \approx \text{const}$ , and then motion with  $\dot{b} \approx -\sqrt{k_2}/C$ . Under unbounded increasing of coefficients  $k_1$  and  $k_2$ , maximal energy of rotation  $E_{\max}$  approximates to the level  $E_0 = k_2/(2k_1)$ .

In optimal solution (when  $k_1 \neq 0$ ), constants  $C_1, C_2$  and time  $T$  are calculated by the equations:

$$(exp(T\sqrt{k_1}) + 1)T = (QC\sqrt{k_1/k_2} + 2/\sqrt{k_1})(exp(T\sqrt{k_1}) - 1) \quad (16)$$

$$C_1 = 2\sqrt{k_2}/(C(1 - exp(-T\sqrt{k_1}))), C_2 = 2\sqrt{k_2}/C - C_1$$

Time of optimal turn  $T$  decreases with increasing of coefficient  $k_2$  (if  $k_1$  is invariable).

Boundary-value problem is to compute  $p_0$  (or,  $p_{10}, p_{20}, p_{30}$ ), and positive constant  $r_0$ , that lead to satisfaction of the terminal condition (2.4) for solution of equations system Equations (1) and (2), Equations (7)–(9) with initial condition (2.3) and dependence  $r_i = r_0 p_i$  ( $r_0 > 0$ ).

If take into account Equation (8), Equations (10) and (11) and optimal values of constants  $C_1$  and  $C_2$  for functions  $a$ ,  $b$ , optimum control and optimum motion is described by expressions:

$$M_i = C_1 [exp(-t\sqrt{k_1}) - exp((t - T)\sqrt{k_1})] p_i / 2 \quad (17)$$

$$L_i = C_1 [1 + exp(-T\sqrt{k_1}) - exp(-t\sqrt{k_1}) - exp((t - T)\sqrt{k_1})] p_i / (2\sqrt{k_1}) \quad (18)$$

$p_i$  satisfy Equation (9) and  $p = \tilde{\Lambda} \circ \Lambda_{in} \circ p_0 \circ \tilde{\Lambda}_{in} \circ \Lambda$ ,  $C_1 = 2\sqrt{k_2}/(C(1 - exp(-T\sqrt{k_1})))$ . Time  $T$  is calculated from Equation (16).

Optimum orientation program is determined by the system Equations (5) and (6), Equations (17) and (18); controlling functions  $M_i$  and angular momentum projections  $L_i$  variate according to Equations (17) and (18). The value  $p_0$  as well as the integral  $Q$ , characterizing complexity of a turn, are computed in solution process of boundary-value problem of a turn. Program value of control  $M$  relates with attitude  $\Lambda$

$$M = a(t)\tilde{\Lambda} \circ \Lambda_{in} \circ p_0 \circ \tilde{\Lambda}_{in} \circ \Lambda / 2$$

at which  $a(t)$  changes by the law Equation (13).

Under optimal angular momentum  $L(t)$ , spacecraft rotation has symmetry properties (for  $b(t)$ ,  $a(t)$ , primarily) as well as regularities:

$$a(0) = -a(T) > 0, a(T - t) = -a(t),$$

$$b(t) \geq 0, b(T - t) = b(t)$$

$$\int_0^{T/2} b(t) dt = \int_{T/2}^T b(t) dt, \int_0^{T/2} |a(t)| dt = \int_{T/2}^T |a(t)| dt$$

$$\Lambda \circ M(T - t) \circ \tilde{\Lambda} = -\Lambda \circ M(t) \circ \tilde{\Lambda}, \Lambda \circ L(T - t) \circ \tilde{\Lambda} = \Lambda \circ L(t) \circ \tilde{\Lambda}$$

$$\max_{0 \leq t \leq T} |M(t)| = \sqrt{k_2}/C, L_{max} = \max_{0 < t < T} \sqrt{L_1^2 + L_2^2 + L_3^2} = |L(T/2)|$$

$$L_{max} = \frac{r_0 + \sqrt{r_0^2 - \frac{4k_1 k_2}{C^2}}}{(2k_1) \text{ или } L_{max}} = (\sqrt{(C_1 - C_2)^2 / 4 - k_2 / C^2} + (C_1 - C_2) / 2) / \sqrt{k_1}$$

Angular momentum and optimum control  $M$  satisfy the following relationships:

$$\Lambda \circ M(T - t) \circ \tilde{\Lambda} = -\Lambda \circ M(t) \circ \tilde{\Lambda}, \Lambda \circ L(T - t) \circ \tilde{\Lambda} = \Lambda \circ L(t) \circ \tilde{\Lambda}$$

The conditions Equation (11) show:  $p$  is ort for angular momentum; optimum

functions  $\varphi_i(t)$ ,  $p_i(t)$ ,  $L_i(t)$  meet dependences Equations (10) and (11), where  $p_i(t)$  satisfy the system (4.2). Optimal control is determined using (4.10); for any instant  $t \in [0, T]$ ,  $M$  and  $L$  are collinear. At instant  $t = T/2$ , direction of torque  $M$  variates to an opposite, and modulus  $|L|$  has maximal value  $|L(T/2)| = L_{\max}$ . Control Equation (17) is truly optimum, since this is single function satisfying to Equations (1) and (7), Equations (8) and (9). Optimal rotation (in sense of minimum index Equation (5)) occurs along “trajectory of free motion” [9]. Specify properties of optimum rotation follow from the system Equation (9) with equalities Equations (11) and (14). Original solution is determined by close equations system Equation (1), Equations (9) and (11), and conditions Equations (3) and (4) for function  $\Lambda(t)$ . Additionally, controlling torque  $M$  is smooth time function. Note: during rotation by inertia, body occupies positions  $\Lambda$  that form “trajectory of free motion” [9,24,26].

Ratio of angular momentum and kinetic energy  $E_k$  under optimum control is expression:

$$E_k = b^2 (p_1^2/J_1 + p_2^2/J_2 + p_3^2/J_3)/2$$

Proportion is  $E_k/|L|^2 = (p_1^2/J_1 + p_2^2/J_2 + p_3^2/J_3)/2 = \text{const}$  for any time within period  $0 \leq t \leq T$ . It is key property for spacecraft motion according to criterion Equation (5).

Problem of optimum control synthesis mainly consists in determination of such vector  $p(0)$  under which the motion, according to the Equation (1), Equations (9) and (18) with condition Equation (3), satisfies the equality Equation (4). To solve this equations system is difficult in general case: its obtaining to compute  $p(0)$ , and  $p(T)$  by Equations (9) and (11) and formula:

$$\Lambda_f \circ p(T) \circ \tilde{\Lambda}_f = \Lambda_{in} \circ p(0) \circ \tilde{\Lambda}_{in} \quad (19)$$

Significant difference of an offered result is applying of new optimality criterion which combines a contribution of control action (in sense of energy consumption) in motion of a spacecraft during a turn, integral of rotational energy, and maneuver time, with known ratio. Integral of the square form of controlling torques in Equation (5) provides limiting of controlling torques, and secondly, controlling variables are smooth (angular momentum is smooth time function, also). Introduction of time in a minimized indicator reduces duration of turn  $T$ . For any turn conditions Equations (3) and (4) (any  $\Lambda_{in}$ ,  $\Lambda_f$ ) and  $J_1, J_2, J_3, k_1, k_2$ , kinetic energy of rotation  $E(t) \leq k_2/(2k_1)$ .

## 5. Particular cases of optimal turn

The determination of optimum rotation mode with minimum index Equation (5) is not trivial issue,  $p(0)$  depends on respective attitude  $\Lambda_f$  and  $\Lambda_{in}$ , and characteristics  $J_1, J_2, J_3$ . It is non-easy to solve the problem of three-dimensional rotation for an arbitrary moments of inertia  $J_1 \neq J_2 \neq J_3$  and attitude in initial and terminal time instants  $\Lambda_{in}$  and  $\Lambda_f$ . Difficulty is to find  $p(T)$ ,  $p(0)$  which satisfy Equation (19). Solution of system Equation (1), Equations (9) and (11) (in analytic form) is known for dynamically symmetric and spherical solid only. For body with spherically symmetry ( $J_1 = J_2 = J_3$ ), function  $p(t)$  is:

$$p_i(t) = \text{const} = p_{i0} = v_i / \sqrt{v_1^2 + v_2^2 + v_3^2}$$

$$M_j = C_1 [\exp(-t\sqrt{k_1}) - \exp((t-T)\sqrt{k_1})] p_{i0} / 2$$

$$L_i(t) = C_1 [1 + \exp(-T\sqrt{k_1}) - \exp(-t\sqrt{k_1}) - \exp((t-T)\sqrt{k_1})] p_{i0} / (2\sqrt{k_1}), i = \overline{1,3}$$

( $v_0, v_1, v_2, v_3$  are the components of quaternion  $\Lambda_t = \tilde{\Lambda}_{in} \circ \Lambda_f$ );  $Q = 2 J_1$  accost  $v_0$ .

During optimal reorientation, spherical spacecraft rotates about the Euler axis, optimum trajectory  $\Lambda(t)$  (in analytic form) is

$$\Lambda(t) = \Lambda_{in} \circ e^{p_0 s(t)/(2J_1)}, s(t) = \int_0^t b(t) dt$$

For dynamically symmetric solid body (for example,  $J_2 = J_3$ ), we can solve optimum control problem completely also (in this case  $p_1 = \text{const} = p_{10}$ ): we have conic motion of spacecraft [10] angular momentum modulus is proportional to velocity about longitudinal axis, and angle between longitudinal axis and angular momentum  $\vartheta$  is constant. Optimal  $p(t)$  is:

$$p_1 = p_{10} = \text{const} = \cos \vartheta,$$

$$p_2 = p_{20} \cos \beta + p_{30} \sin \beta,$$

$$p_3 = -p_{20} \sin \beta + p_{30} \cos \beta,$$

$$\beta = \frac{J_3 - J_1}{J_1 J_2} \int_0^t L_1(t) dt \quad (20)$$

$$\Lambda_f = \Lambda_{in} \circ e^{p_0 \beta / 2} \circ e^{e_1 \alpha / 2}$$

where  $e_1$  is unit vector of longitudinal axis of spacecraft;  $\alpha$  and  $\beta$  are angles of turns about longitudinal axis, and about  $p$ , accordingly ( $|\alpha| \leq \pi, 0 \leq \beta \leq \pi$ ).

For this case, the relations Equations (17) and (18), Equation (20) are solution for system of Equations (2) and (9) under condition Equation (8);  $p$  generates the cone about axis of body's symmetry in body frame (spacecraft coordinate system). To transfer body from attitude  $\Lambda_{in}$  in attitude  $\Lambda_f$ , it rotates simultaneously about its own longitudinal axis, and about  $c_E$ , that is constant in inertial coordinate system. Axial-symmetric solid rotates along "conical trajectory". Note,  $p_0$  (corresponding to optimum solution) we can calculate by device [38]. Optimal functions  $M_i(t)$  are written in analytical form:

$$M_1 = C_1 [\exp(-t\sqrt{k_1}) - \exp((t-T)\sqrt{k_1})] p_{10} / 2$$

$$M_2 = C_1 [\exp(-t\sqrt{k_1}) - \exp((t-T)\sqrt{k_1})] \sqrt{1 - p_{10}^2} \sin(\kappa + \gamma) / 2$$

$$M_3 = C_1 [\exp(-t\sqrt{k_1}) - \exp((t-T)\sqrt{k_1})] \sqrt{1 - p_{10}^2} \cos(\kappa + \gamma) / 2$$

Programmed values  $L_i$  (the components of angular momentum  $L$ ) are:

$$L_1 = C_1 [1 + \exp(-T\sqrt{k_1}) - \exp(-t\sqrt{k_1}) - \exp((t-T)\sqrt{k_1})] p_{10} / (2\sqrt{k_1})$$

$$L_2 = C_1 [1 + \exp(-T\sqrt{k_1}) - \exp(-t\sqrt{k_1}) - \exp((t-T)\sqrt{k_1})] \sqrt{1 - p_{10}^2} \sin(\kappa + \gamma) / (2\sqrt{k_1})$$

$$L_3 = C_1 [1 + \exp(-T\sqrt{k_1}) - \exp(-t\sqrt{k_1}) - \exp((t-T)\sqrt{k_1})] \sqrt{1 - p_{10}^2} \cos(\kappa + \gamma) / (2J\sqrt{k_1})$$

where  $\gamma = \arcsin(p_{20}/\sqrt{1 - p_{10}^2})$ , if  $p_{30} \geq 0$ , or  $\gamma = \pi - \arcsin(p_{20}/\sqrt{1 - p_{10}^2})$ , если  $p_{30} < 0$  ( $|p_{10}| \neq 1$ ); case  $|p_{10}| = 1$  corresponds to planar rotation around axis  $OX$ , and it is not considered.

Optimal trajectory  $\Lambda(t)$  is:

$$\Lambda(t) = \Lambda_{in} \circ e^{p_0 \sigma / 2} \circ e^{\mu e_1 / 2}$$

where:

$$\sigma = C_1 [( \exp(-T\sqrt{k_1}) + 1)t / (2\sqrt{k_1}) + (\exp(-t\sqrt{k_1}) + \exp(-T\sqrt{k_1}) - \exp((t-T)\sqrt{k_1}) - 1) / (2k_1)] / J_2$$

$\mu = p_{10} \sigma (J_2 - J_1) / J_1$  (for optimal  $p_0$  and  $t = T$ , conditions Equations (3) and (4) are satisfied).

For asymmetric body ( $J_1 \neq J_2 \neq J_3$ ), the system Equation (1), Equations (9) and (11) can be solved using only numeric methods (for example, method of successive approximations, or iterations methods). One of such methods has been described in detail in the article [9]. We know that the solution  $p(0)$  which satisfies the conditions  $\Lambda(0) = \Lambda_{in}$ ,  $\Lambda(T) = \Lambda_f$  and (4.12) for the system of Equation (1), Equations (9) and (11) does not depend on a type of changing the magnitude of angular momentum [18] (therefore, we take  $b = \text{const} \neq 0$  in Equation (11) for search of  $p(0)$ ). To compute the vector  $p(0)$ , we must solve the boundary problem  $\Lambda(0) = \Lambda_{in}$ ,  $\Lambda(T) = \Lambda_f$ , taking into account the Equations (1) and (2) in which  $M_i = 0$ . As a result, vector of angular momentum at initial instant of time  $L_{cal}$ , for which a spacecraft rotates with its free motion ( $M = 0$ ) from the state  $\Lambda(0) = \Lambda_{in}$ ,  $L(0) = L_{cal}$  to the state  $\Lambda(T) = \Lambda_f$ , will be found. The vector  $p_0 = p(0)$  relates to  $L_{cal}$  as follows:

$$p_{i0} = \frac{L_{i cal}}{\sqrt{L_{1cal}^2 + L_{2cal}^2 + L_{3cal}^2}}$$

Other schemes of computing can be successful for some specific or particular cases [39–41].

## 6. Example and results of mathematical modeling

Now, we demonstrate numeric example of optimal turn with minimum of Equation (5). Let us take spatial reorientation for 180 degrees from state  $\Lambda_{in}$ , corresponding to spatial position when spacecraft axis are parallel to the axis of inertial frame  $I$ , in an assigned attitude  $\Lambda_f$ , if angular rate is absent at instants  $t = 0$ , and  $t = T$  (i.e.,  $L(0) = L(T) = 0$ ). The quaternion  $\Lambda_f$  has the following components:

$$\lambda_0 = 0, \lambda_1 = 0.707107, \lambda_2 = 0.5, \lambda_3 = 0.5$$

It is assumed that spacecraft has characteristics:


$$J_1 = 63559 \text{ kg}\cdot\text{m}^2, J_2 = 192218.5 \text{ kg}\cdot\text{m}^2, J_3 = 176809 \text{ kg}\cdot\text{m}^2$$

Further, after constructing the control program for optimum angular momentum variation during spacecraft rotation from state Equation (3) in the required state Equation (4), result of mathematic simulation of optimum turn are presented for the following coefficients:  $k_1 = 0.002 \text{ s}^{-2}$  and  $k_2 = 0.04 \text{ J/s}^2$ .

Decision of boundary-value problem of the turn from attitude  $A(0) = A_{in}$  to orientation  $A(T) = A_f$  give  $p_0 = \{0.49535062; -0.11725655; 0.86074309\}$  calculated. The method of iterations has been used, ensuring process of successive-approximation to true  $p_0$  [9] (the method ensures asymptotic approaching in absolute most of cases). Maximum of control torque modulus is  $|M(0)| = 70.2 \text{ N m}$ , and  $Q = 401.63 \text{ kN m s}^2$ .

### 7. Result and discussion

Mathematical calculations results and numerical simulation of optimum turn process are shown on **Figures 2–5** (in graphical form). **Figure 2** presents a varying of angular momentum as time function ( $L_1(t)$ ,  $L_2(t)$ ,  $L_3(t)$  as projections on the body frame axes). Behavior of spacecraft attitude  $\Lambda(t)$  during optimum maneuver is illustrated by **Figure 3** (functions  $\lambda_0, \lambda_1, \lambda_2, \lambda_3$ ). Dynamics of  $p_1, p_2, p_3$  for  $p$  is reflected on **Figure 4**. Finally, **Figure 5** give behavior of angular momentum modulus. Duration of optimal maneuver is  $T = 271.2 \text{ s}$ . The rotational energy during a turn does not exceed  $E_{\max} = 9.9 \text{ joules}$ , spacecraft angular momentum has maximum magnitude  $L_{\max} = 1562 \text{ N m s}$  at time  $t = 135.6 \text{ s}$ . It is seen that  $p_1$  changes lot less than  $p_2, p_3$ . For optimum control, all  $p_i, L_i, \lambda_j$  are smooth time functions.

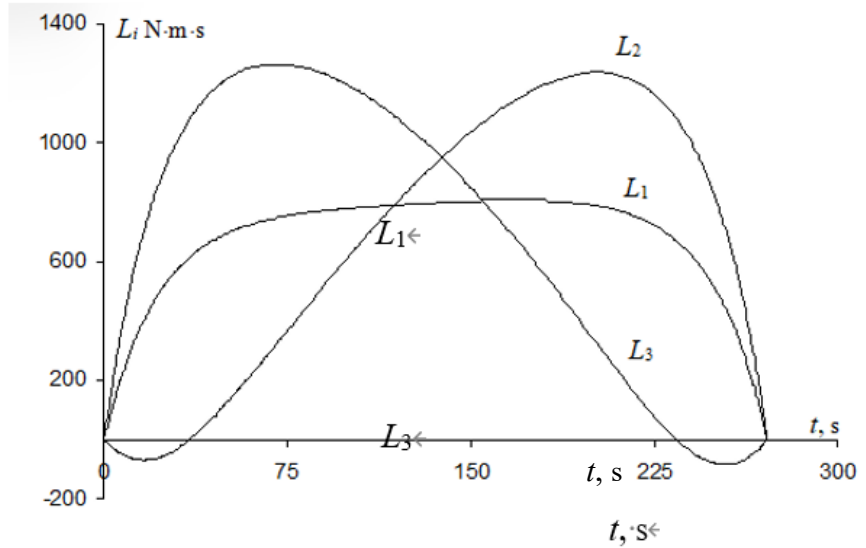

**Figure 2.** Angular momentum components during optimum turn.

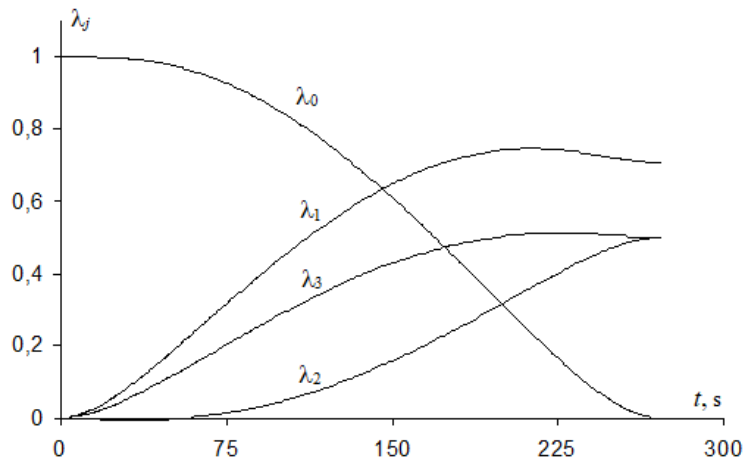


Figure 3. Quaternion ( $t$ ) elements during optimum maneuver.

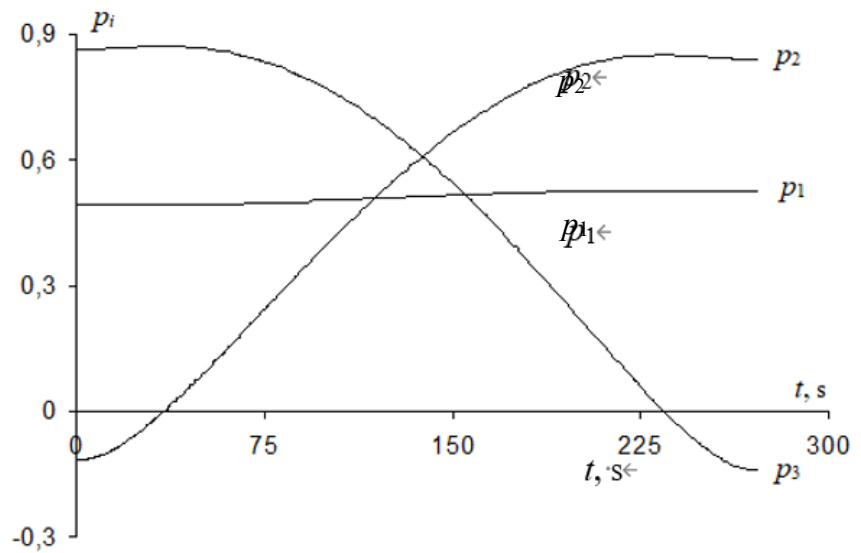


Figure 4. Variation of  $p$  under optimum control.

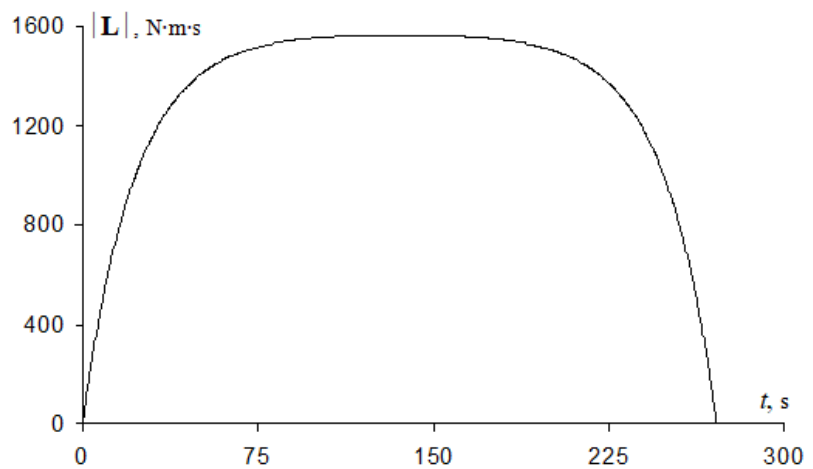


Figure 5. Variation of angular momentum modulus during optimal process.

## 8. Conclusion

Problem of optimum control of rotation from the initial attitude to the prescribed

final attitude was researched in detail. In the considered investigation, new control method of spacecraft was designed; chosen optimality criterion is unique. The developed method for motion control was described in details. For optimization, the selected index of quality combines time, integral of the kinetic energy of rotation and control contribution (as energy consumption), necessary for turn realization. A solved problem is very topical. The issue of economical control of rotation is relevant very much, therefore, a task considered above is very important practically. Importance (implication, or significance) of the made research is that optimization of the adopted quality index minimizes energy costs (for example, electric energy consumption if spacecraft orientation control is performed by EJE-engines).

Main properties of reorientation and trajectory type corresponding to a chosen index of quality Equation (5) have been discovered. The maximum principle and quaternion models were used. As was shown, ratio of kinetic rotary energy to a squared modulus of angular momentum is constant. It was illustrated, mode of control when an angular momentum and a controlling moment are parallel over entire time period of rotation is optimal turn. The Hamilton and the conjugate equations system as well as analytical expressions for optimum controlling functions were written for optimization problem formulated in article. The structure of optimal control was defined, basing on the necessary optimality conditions. Relations for determining a spatial rotation were given, analytical formulas were written. The found optimal solution is unique.

Algorithm for orientation control is an essential element of attitude control system (for spacecrafts, and orbital stations, in particular). Analytical solving of a proposed problem has been presented. Computing expressions (and equations formalized) have been written for optimum program of controlled turn. Formulas to estimate maximum rotational energy and calculate maximum control torque magnitude were written analytically. Expressions of temporal characteristics of optimum process were presented. Implementation of controlled turn was described, also. Presence of calculated formulas given in explicit form, does a made work practically suitable and significant for direct applying in spaceflights practice. Optimum algorithms designed for spacecraft motion control improves a control system efficiency, originating spacecraft performance more economic during orbital flight.

Principal difference of solution, presented in this research, is new quality index used, and control torques cannot be unboundedly large even restrictions in absence for control. It is the original point of this article. Presence of energy integral in Equation (5) limits spacecraft's kinetic energy of rotation. Also, in an obtained mode, controlling torque modulus is not constant. Single admissible version of optimal solution is motion with variable control torque modulus (rotation period with constant control modulus are absent absolutely). How flat change the modulus of an angular momentum modulus, is defined by the coefficient of proportion  $k_1$ . The coefficients  $k_1$  and  $k_2$  (the ratio  $k_2/k_1$ ) specify maximal energy of rotation.

Example of mathematic modeling which demonstrated a behavior of attitude parameters was given. For dynamically symmetric spacecraft (as special particular case), design of optimum control has been completed: the equations system has been written analytically (in direct form) that allows to solve two-point boundary value



problem directly (to calculate the constants required for control law). The developed method of spacecraft control differs from all known publications. Its usefulness lies in significantly saving of control resources that will increase possibilities of spacecraft. In particular, interest causes use our method in spacecraft with EJE (or ion engines) because modern EJE has very large value of specific impulse (6000–6500 s approximately [42]) that require less fuel costs, and first integral in Equation (5) estimates electrical consumption. Second integral in Equation (5) limits kinetic energy of rotation (it is important in spaceflight, also). Necessity to reduce energy consumption is relevant problem, therefore research and optimization of optimal turn using on Equation (5) is topical.

**Conflict of interest:** The author declares no conflict of interest.

## References

1. Sinitsin LI, Kramlikh AV. Synthesis of the optimal control law for the reorientation of a nanosatellite using the procedure of analytical construction of optimal regulators. *Journal of Physics: Conference Series*. 2021; 1745(1): 012053. doi: 10.1088/1742-6596/1745/1/012053
2. Velishchanskii MA, Krishchenko AP, Tkachev SB. Synthesis of spacecraft reorientation algorithms using the concept of the inverse dynamic problem. *J. Comput. Syst. Sci. Int.* 2003; 42: 811-818.
3. Junkins JL, Turner JD. *Optimal spacecraft rotational maneuvers*. Elsevier, Amsterdam; 1986.
4. Reshmin SA. Threshold Absolute Value of a Relay Control when Time-Optimally Bringing a Satellite to a Gravitationally Stable Position. *Journal of Computer and Systems Sciences International*. 2018; 57(5): 713-722. doi: 10.1134/s106423071805012x
5. Scrivener SL, Thompson RC. Survey of time-optimal attitude maneuvers. *Journal of Guidance, Control, and Dynamics*. 1994; 17(2): 225-233. doi: 10.2514/3.21187
6. Zhou H, Wang D, Wu B, et al. Time-optimal reorientation for rigid satellite with reaction wheels. *International Journal of Control*. 2012; 85(10): 1452-1463. doi: 10.1080/00207179.2012.688873
7. Reshmin SA. The Threshold Absolute Value of a Relay Control Bringing a Satellite to a Gravitationally Stable Position in Optimal Time. *Doklady Physics*. 2018; 63(6): 257-261. doi: 10.1134/s1028335818060101
8. Shen H, Tsiotras P. Time-Optimal Control of Axisymmetric Rigid Spacecraft Using Two Controls. *Journal of Guidance, Control, and Dynamics*. 1999; 22(5): 682-694. doi: 10.2514/2.4436
9. Levskii MV. Pontryagin's maximum principle in optimal control problems of orientation of a spacecraft. *Journal of Computer and Systems Sciences International*. 2008; 47(6): 974-986. doi: 10.1134/s1064230708060117
10. Molodenkov AV, Sapunkov YaG. Analytical Solution of the Minimum Time Slew Maneuver Problem for an Axially Symmetric Spacecraft in the Class of Conical Motions. *Journal of Computer and Systems Sciences International*. 2018; 57(2): 302-318. doi: 10.1134/s1064230718020120
11. Branets VN, Chertok MB, Kaznacheev YV. Optimal turn of a rigid body with a single axis of symmetry. *Kosm. Issl.* 1984; 22(3): 352–360.
12. Branets VN, Shmyglevskii IP. Use of quaternions in problems of orientation of solid bodies. *Nauka*. 1973.
13. Strelkova NA. On optimal reorientation of a solid, in *Problems of Mechanics of Controlled Motion. Nonlinear Dynamical Systems*. PGU, Perm; 1990. pp. 115–133.
14. Aipanov ShA, Zhakypov AT. The Method of Separation of Variables and its Application to the Problem of a Spacecraft's Optimal Turn. *Cosmic Research*. 2020; 58(1): 53-63. doi: 10.1134/s0010952520010013
15. Pankov AA., Chelnokov YuN. Investigation of quaternion laws of kinematic control of solid body orientation in angular velocity. *Mechanics of Solids*. 1995; 30(6): 3-13.
16. Zelepukina OV, Chelnokov YuN. Construction of optimal laws of variation in the angular momentum vector of a dynamically symmetric rigid body. *Mechanics of Solids*. 2011; 46(4): 519-533. doi: 10.3103/s0025654411040030
17. Biryukov VG, Chelnokov YuN. Construction of optimal laws of variation of the angular momentum vector of a rigid body. *Mechanics of Solids*. 2014; 49(5): 479-494. doi: 10.3103/s002565441405001x

18. Levskii MV. Optimal spacecraft terminal attitude control synthesis by the quaternion method. *Mechanics of Solids*. 2009; 44(2): 169-183. doi: 10.3103/s0025654409020022
19. Levskii MV. Use of universal variables in problems of optimal control concerning spacecrafts orientation. *Mekhatron., Avtomatiz., Upravl.* 2014; 53-59.
20. Molodenkov AV, Sapunkov YaG. Analytical solution of the optimal slew problem for an axisymmetric spacecraft in the class of conical motions. *Journal of Computer and Systems Sciences International*. 2016; 55(6): 969-985. doi: 10.1134/s1064230716060095
21. Molodenkov AV, Sapunkov YaG. Analytical Quasi-Optimal Solution of the Slew Problem for an Axially Symmetric Rigid Body with a Combined Performance Index. *Journal of Computer and Systems Sciences International*. 2020; 59(3): 347-357. doi: 10.1134/s1064230720030107
22. Sapunkov YaG, Molodenkov AV. Analytical Solution of the Problem on an Axisymmetric Spacecraft Attitude Maneuver Optimal with Respect to a Combined Functional. *Automation and Remote Control*. 2021; 82(7): 1183-1200. doi: 10.1134/s0005117921070043
23. Molodenkov AV, Sapunkov YaG. Analytical approximate solution of the problem of a spacecraft's optimal turn with arbitrary boundary conditions. *Journal of Computer and Systems Sciences International*. 2015; 54(3): 458-468. doi:10.1134/s1064230715030144
24. Levskii MV. Control of the Rotation of a Solid (Spacecraft) with a Combined Optimality Criterion Based on Quaternions. *Mechanics of Solids*. 2023; 58(5): 1483-1499. doi: 10.3103/s002565442360040x
25. Molodenkov AV, Sapunkov YaG. Optimal control of rigid body's rotation movement with a combined quality criterion. *Journal of Computer and Systems Sciences International*. 2019; 58(3): 382-392. doi: 10.1134/S1064230719030122
26. Sapunkov YaG., Molodenkov AV. Quasioptimal spacecraft attitude control constructed according to the poincot concept. *Aerospace* 2023; 10(5): 402. doi: 10.3390/aerospace10050402
27. Molodenkov AV, Sapunkov YaG. Analytical quasi-optimal solution for the problem on turn maneuver of an arbitrary solid with arbitrary boundary conditions. *Mechanics of Solids*. 2019; 54(2): 54(3): 474-485 doi: 10.3103/S0025654419020110
28. Levskii MV. Optimization problem of attitude control of a spacecraft with bounded rotary energy using quaternions. *International Robotics & Automation Journal*. 2021; 7(2): 63-73. doi: 10.15406/iratj.2021.07.00228
29. Hao Zhou, Danwei Wang, Baolin Wu, EK Poh. Time-optimal reorientation for rigid satellite with reaction wheels. *International Journal of Control*. 2012; 85(10): 1-12.
30. Levskii MV. Special aspects in attitude control of a spacecraft, equipped with inertial actuators, *J. Comp. Sci. Appl. Informat. Technol.* 2017; 2: 1-9. <https://doi.org/10.15226/2474-9257/2/4/00121>
31. Levskii MV. Method of controlling a spacecraft turn. RF Patent for the Invention No. 2093433, 22.03.1994.
32. Gorshkov OA, Muravev VA, Shagayda AA. Holl's and ionic plasma engines for spacecrafts. *Mashinostroenie*; 2008.
33. Pontryagin LS, Boltyanskii VG, Gamkrelidze RV, et al. *The mathematical theory of optimal processes*. Springer; 1986.
34. Chanyal BC, Pathak M. Quaternionic Approach to Dual Magnetohydrodynamics of Dyonic Cold Plasma. *Advances in High Energy Physics*. 2018: 1-13. doi: 10.1155/2018/7843730
35. Chanyal BC. Quaternionic approach on the Dirac–Maxwell, Bernoulli and Navier–Stokes equations for dyonic fluid plasma. *International Journal of Modern Physics A*. 2019; 34(31): 1950202. doi: 10.1142/s0217751x19502026
36. Chanyal BC, Karnatak S. A comparative study of quaternionic rotational Dirac equation and its interpretation. *International Journal of Geometric Methods in Modern Physics*. 2020; 17(02): 2050018. doi: 10.1142/s0219887820500188
37. Young LC. *Lectures on the calculus of variations and optimal control theory*. EA: Saunders, Philadelphia; 1969.
38. Levskii MV. Device for regular rigid body precession parameters formation. RF Patent for the Invention, No. 2146638, 27.02.1996.
39. Lastman GJ. A shooting method for solving two-point boundary-value problems arising from non-singular bang-bang optimal control problems. *International Journal of Control*. 1978; 27(4): 513-524. doi: 10.1080/00207177808922388
40. Bertolazzi E, Biral F, Da Lio M. Symbolic-numeric efficient solution of optimal control problems for multibody systems. *Journal of Computational and Applied Mathematics*. 2006; 185(2): 404-421. doi: 10.1016/j.cam.2005.03.019
41. Kumar S, Kanwar V, Singh S. Modified Efficient Families of Two and Three-Step Predictor–Corrector Iterative Methods for Solving Nonlinear Equations. *Applied Mathematics*. 2010; 01(03): 153-158. doi: 10.4236/am.2010.13020
42. Kulkov VM, Gorshkov VA, Egorov YG, et al. Comparative estimation of efficiency of applying the perspective types of electric-rocket engines on small spacecrafts, *Byull. Samara's State Space University*; 2012.